


CAP ANSI B16.9

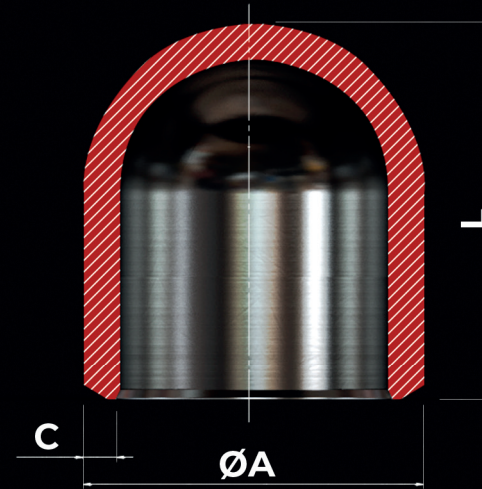

| OD | A | L | C | | | |
|--------|-------|-------|---------|----------|----------|----------|
| | | | SCH 5S. | SCH 10S. | SCH 40S. | SCH 80S. |
| 1/2" | 21,3 | 25,4 | 1,65 | 2,11 | 2,77 | 3,73 |
| 3/4" | 29,7 | 25,4 | 1,65 | 2,11 | 2,87 | 3,91 |
| 1" | 33,4 | 38,1 | 1,65 | 2,77 | 3,38 | 4,55 |
| 1.1/4" | 42,2 | 38,1 | 1,65 | 2,77 | 3,56 | 4,85 |
| 1.1/2" | 48,3 | 38,1 | 1,65 | 2,77 | 3,68 | 5,08 |
| 2" | 60,3 | 38,1 | 1,65 | 2,77 | 3,91 | 5,54 |
| 2.1/2" | 73,0 | 38,1 | 2,11 | 3,05 | 4,16 | 7,01 |
| 3" | 88,9 | 50,8 | 2,11 | 3,05 | 5,49 | 7,62 |
| 4" | 114,3 | 63,5 | 2,11 | 3,05 | 6,02 | 8,56 |
| 5" | 141,3 | 76,2 | 2,77 | 3,40 | 6,55 | 9,53 |
| 6" | 168,3 | 88,9 | 2,77 | 3,40 | 7,11 | 10,97 |
| 8" | 219,1 | 101,6 | 2,77 | 3,76 | 8,18 | 12,7 |
| 10" | 273,0 | 127,0 | 3,40 | 4,19 | 9,27 | 12,7 |
| 12" | 323,9 | 152,4 | 3,96 | 4,57 | 9,53 | 12,7 |
| 14" | 355,6 | 165,1 | 3,96 | 4,78 | - | - |
| 16" | 406,4 | 177,8 | 4,20 | 4,78 | - | - |
| 18" | 457,2 | 203,2 | 4,20 | 4,78 | - | - |
| 20" | 508,0 | 228,6 | 4,78 | 5,54 | - | - |
| 22" | 558,8 | 254,0 | 4,78 | 6,35 | - | - |
| 24" | 609,6 | 266,7 | 5,54 | 63,5 | - | - |

Manufacture Material

Stainless Steel ASTM A403
WPS / WPW 304/L and 316/L

Norms

SCH 5
SCH 10
SCH 40
SCH 80
SCH 160

All measures may change
without prior notice

X-STEEL