


Union Threaded

Manufacturing Material

ASTM A182 TP GR F.304/L
and F.316LS

All measures may change
without prior notice

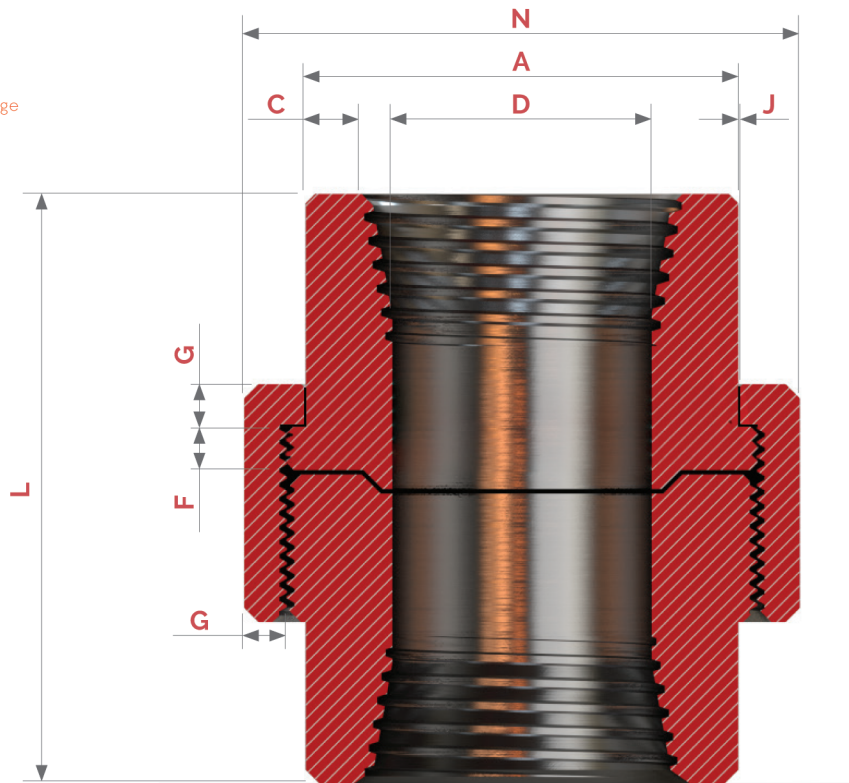

Ø	A	C	D*	F	G	H	J	L	N
1/8	14,7	2,41	8,43 6,43	3,18	3,18	16	1,24	41,4	50,8
1/4	19,0	3,02	11,13 9,45	3,18	3,18	16	1,24	41,4	50,8
3/8	22,9	3,2	14,27 13,51	3,43	3,43	14	1,37	46,0	55,9
1/2	27,7	3,73	17,86 17,07	3,69	3,69	14	1,5	49,0	58,4
3/4	33,5	3,91	23,01 21,39	4,06	4,06	11	1,68	56,9	66,0
1	41,4	4,55	28,98 27,74	4,57	4,45	11	1,85	62,0	78,4
1.1/4	50,5	4,85	37,69 35,36	5,33	5,21	10	2,13	71,1	94,0
1.1/2	57,2	5,08	43,54 41,2	5,84	5,59	10	2,31	76,5	111,8
2	70,1	5,54	55,58 52,12	6,6	6,35	10	2,69	86,1	132,1
2.1/2	85,3	7,01	66,27 64,31	7,49	7,11	8	3,07	102,4	149,9
3	102,4	7,62	88,25 77,27	8,26	8,0	8	3,53	109,0	175,3

Discover our other product lines

The upper and lower values for each size are the respective maximum and minimum dimensions

Sanitary Fittings
Threaded Fittings
Tubular Fittings

Stainless Steel Flange
Stainless Steel Pipes
Sanitary Valves

X-STEEL